


EFD,EPC Type Cores

Ordering Code 品名の構成

2G8-EPC-13

Material 材質 Type 形 Length(A) A寸法

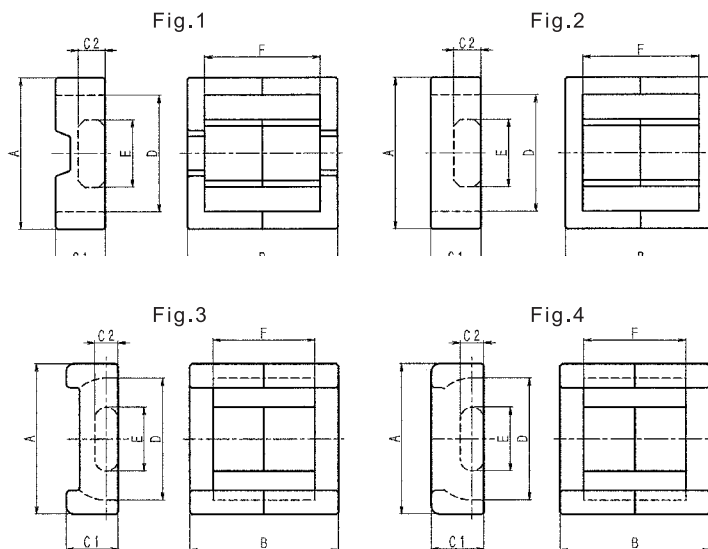

Dimensions 寸法

Cores 形名	Dimensions (mm) 寸法							Weight 重量 (g)	BOBBIN Available	Fig.
	A	B	C1	C2	D	E	F			
EFD-12	12.5±0.3	12.4±0.3	3.50±0.1	2.0±0.1	9.0±0.25	5.4±0.15	9.1±0.3	1.6		1
EFD-15	15.0±0.4	15.0±0.3	4.65±0.15	2.4±0.1	11.0±0.35	5.3±0.15	11.0±0.4	2.8	10P	1
EFD-20	20.0±0.55	20.0±0.3	6.65±0.15	3.6±0.15	15.4±0.5	8.9±0.2	15.4±0.5	7.0	8P	1
EFD-20X25	20.0±0.55	25.2±0.4	6.65±0.15	3.6±0.15	15.4±0.5	8.9±0.2	20.6±0.4	8.6		1
EFD-20.3X25.5	20.3±0.35	25.5±0.5	6.65 ^{+0.2} _{-0.15}	3.6 ^{+0.2} _{-0.15}	15.7±0.3	8.9±0.2	20.9±0.4	8.7		2
EFD-22X25	22.0±0.4	25.0±0.3	7.8±0.15	4.5±0.15	16.6±0.35	10±0.15	18.6±0.3	11.5		1
EFD-25	25.0±0.65	25.0±0.3	9.1±0.2	5.2±0.15	18.7±0.6	11.4±0.2	18.6±0.5	16.3		1
EPC-10	10.2±0.2	8.1±0.2	3.4±0.1	1.9±0.1	7.6 ₋₀	5.0±0.1	5.3±0.2	0.9		4
EPC-13	13.2±0.4	13.2±0.4	4.6±0.2	2.05±0.15	10.7±0.4	5.6±0.15	9.0±0.4	2.0	10P	3
EPC-16.8	16.8±0.3	14.8±0.3	5.75±0.2	2.8±0.15	13.5 ₋₀	7.7±0.15	10.8±0.3	3.8		4
EPC-17	17.5±0.3	17.1±0.4	6.0±0.15	2.8±0.1	14.3 ₋₀	7.7±0.15	12.1±0.4	4.4	10P	3
EPC-19	19.0±0.5	19.5±0.4	6.0±0.25	2.5±0.15	16.0 ^{+0.5} _{-0.3}	8.5±0.15	14.5±0.4	4.9	11P	3
EPC-25	25.0±0.4	25.0±0.4	8.0±0.2	4.0±0.1	21.0±0.35	11.5±0.2	18.0±0.6	12.6	11P	3

Electrical Characteristics 電気的特性

Cores 形名	AL-Value (nH/N ²) Without air gap ギャップなし					
	2H1	2E2B	2G1	2H4A	2G8	2H8
EFD-12					850±25%	750±25%
EFD-15	3500min	2660min	1600±25%	1200±25%	1050±25%	780±25%
EFD-20		3360min	2800±25%		1500±25%	1450±25%
EFD-20X25					1300±25%	
EFD-20.3X25.5					1300±25%	
EFD-22X25						
EFD-25			4500±25%		2100±25%	2000±25%
EPC-10	2940min	2450min			850±25%	
EPC-13	3290min	2380min	1500±25%		940±25%	700±25%
EPC-16.8		3850min			1400±25%	
EPC-17		3500min			1150±25%	1000±25%
EPC-19		3080min	2000±25%		1100±25%	880±25%
EPC-25					1560±25%	1450±25%