


形状・寸法 / 特性

Shapes and dimensions/Characteristics

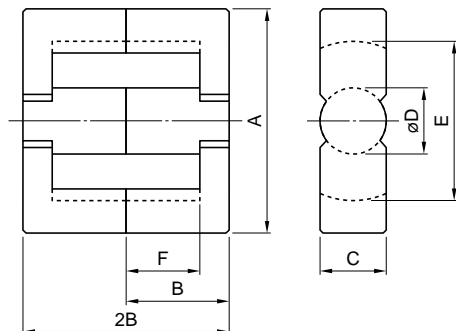

形状 Type	寸法 Dimensions(mm)								EC style	Bobbin
	A	2B	B	C	øD	E min.	2F min.	F		
EER-7.5D	7.50±0.15	5.00	2.50±0.10	4.00±0.10	2.60±0.10	5.60	3.36	1.75±0.07		
EER-9.3K	9.30±0.20	4.80	2.40±0.05	4.85±0.15	3.35±0.15	7.65	3.20	1.675±0.075		
EER-9.3S	9.35±0.15	3.95	1.975±0.05	4.90±0.10	3.40±0.10	7.48	2.00	1.075±0.075		
EER-10.8K	10.8±0.2	4.90	2.45±0.10	5.90±0.10	4.38±0.13	8.70	2.96	1.58±0.10		
EER-10.8S	10.83±0.18	3.85	1.925±0.05	5.90±0.10	4.13±0.13	8.70	1.95	0.975min.		
EER-10.8D	10.83±0.2	4.90	2.45±0.10	5.90±0.10	4.13±0.13	8.70	2.95	1.575±0.10		
EER-12.4D	12.4±0.25	8.20	4.10±0.10	5.00±0.15	3.40±0.10	10.4	6.00	3.10±0.10		
EER-17.5S	17.5±0.5	16.5	8.25±0.20	5.05±0.25	5.05±0.25	13.0	12.5	6.25±0.10		
EER-24K	24.4±0.6	28.9	14.45±0.15	8.50±0.40	8.50±0.20	18.0	19.8	10.1±0.2		
EER-25.5A	25.5±0.6	18.6	9.30±0.25	7.50±0.25	7.50±0.25	19.7	11.9	6.20±0.25		
EER-25.5B	25.5±0.6	31.0	15.5±0.3	7.50±0.25	7.50±0.25	19.7	24.2	12.4±0.3		
EER-28.5U	28.5±0.6	16.7	8.35±0.20	11.4±0.3	9.90±0.30	21.1	9.00	4.65±0.15		
EER-28.5T	28.5±0.6	21.8	10.9±0.3	11.4±0.3	9.90±0.20	21.1	12.6	6.50±0.20		
EER-28.5A	28.5±0.6	28.0	14.0±0.3	11.4±0.3	9.90±0.30	21.1	18.6	9.60±0.30		
EER-28.5B	28.5±0.6	33.8	16.9±0.3	11.4±0.3	9.90±0.30	21.1	24.4	12.5±0.3		
EER-30M	29.8±0.8	31.6	15.8±0.4	9.50±0.40	9.50±0.30	21.9	21.4	11.0±0.3		
EER-33S	33.0±0.5	26.0	13.0±0.2	14.0±0.25	12.5±0.25	24.7	16.5	8.50±0.25		
EER-33K	33.0±0.5	34.0	17.0±0.2	14.0±0.25	12.5±0.25	24.7	24.5	12.5±0.25		
EER-34.2	34.2±0.8	34.6	17.3±0.3	10.8±0.3	10.8±0.3	25.6	23.6	12.1±0.3		
EER-35H	35.0±0.7	33.6	16.8±0.3	11.3±0.3	11.3±0.3	25.6	21.0	10.8±0.3		
EER-35A	35.0±0.8	41.4	20.7±0.3	11.3±0.3	11.3±0.3	25.3	28.8	14.7±0.3		
EER-35B	35.0±0.9	48.8	24.4±0.4	11.3±0.3	11.3±0.3	25.2	36.0	18.4±0.4		
EER-39J	39.0±0.7	44.4	22.2±0.3	12.8±0.3	12.8±0.3	28.6	33.5	17.0±0.25		
EER-39.1	39.1±0.8	39.6	19.8±0.3	12.5±0.3	12.5±0.3	29.3	28.6	14.6±0.3		
EER-40H	40.0±0.5	42.3	21.15±0.2	15.0±0.2	14.0±0.25	30.7	29.9	15.15±0.2		
EER-40D	40.0±0.5	44.8	22.4±0.2	13.3±0.25	13.3±0.25	29.0	30.3	15.4±0.25		
EER-40	40.0±0.5	54.6	27.3±0.2	13.3±0.25	13.3±0.25	29.0	40.0	20.3±0.3		
EER-42	42.0±0.8	42.4	21.2±0.2	15.2±0.4	15.2±0.2	30.1	29.8	15.3±0.4		
EER-42P	42.0±0.5	42.4	21.2±0.2	19.6±0.4	17.3±0.25	31.8	30.0	15.25±0.25		
EER-42D	42.0±0.6	44.8	22.4±0.2	15.5±0.25	15.5±0.25	29.4	30.2	15.4±0.3		
EER-44	44.0±0.8	44.6	22.3±0.4	14.8±0.4	14.8±0.4	32.5	32.2	16.5±0.4		
EER-45	45.0±1.0	48.0	24.0±0.4	14.8±0.4	14.8±0.4	32.5	32.2	16.5±0.4		
EER-48.7	48.7±1.1	49.4	24.7±0.4	16.3±0.4	16.3±0.4	36.1	35.4	18.1±0.4		
EER-49M	49.0±0.8	47.8	23.9±0.3	17.2±0.4	17.2±0.25	36.3	30.2	15.4±0.3		
EER-49L	49.0±0.8	54.0	27.0±0.3	17.2±0.4	17.2±0.25	36.4	36.4	18.5±0.3		
EER-49P	49.0±0.7	55.0	27.5±0.2	17.2±0.4	17.2±0.25	36.4	37.6	19.0±0.2		
EER-54K	54.2±0.8	49.4	24.7±0.25	18.8±0.4	18.8±0.4	40.0	33.8	17.2±0.3		
EER-90	90.0±1.8	90.0	45.0±0.65	30.0±1.0	30.0±1.0	68.5	70.0	35.5±0.5		
EER-94	94.0±1.8	95.0	47.5±0.65	30.0±1.0	30.0±1.0	68.5	70.0	35.5±0.5		

FERRITE CORES FOR POWER SUPPLY

EERコア
EER Cores



形状 Type	AL value(nH/N ²)±25%				コア定数 Core parameters					Weight (g/set)
	MB1	MB3	MB4	MBT1	C _i (mm ⁻¹)	Le(mm)	A _e (mm ²)	A _{min} (mm ²)	Ve(mm ³)	
EER-7.5D	735	839	839	985	2.10	12.5	5.96	5.31	74.7	0.45
EER-9.3K	840	955	955	1110	1.74	14.0	8.04	8.81	113	0.69
EER-9.3S	1080	1210	1210	1390	1.27	11.9	9.31	9.07	111	0.66
EER-10.8K	1290	1460	1460	1700	1.15	14.3	12.3	15.1	176	1.1
EER-10.8S	1340	1510	1510	1740	1.04	12.4	12.0	10.2	149	0.90
EER-10.8D	1220	1380	1380	1610	1.21	14.4	12.0	10.2	173	0.98
EER-12.4D	705	700	700	996	2.53	23.4	9.27	8.88	217	1.2
EER-17.5S	940	1100	1100	1350	1.94	40.1	20.7	20.0	830	4.38
EER-24K	1920	2260	2260	2890	1.07	62.5	58.5	53.7	3660	19.8
EER-25.5A	1810	2000	2000	2670	1.08	47.6	44.2	42.4	2100	11.0
EER-25.5B	1280	1500	1500	1960	1.65	72.4	43.8	42.4	3170	16.3
EER-28.5U	3580	4170	4170	5160	0.524	42.9	81.9	77.0	3510	19.2
EER-28.5T	3300	3890	3890	4810	0.579	50.8	87.7	77.0	4450	25.5
EER-28.5A	2740	3270	3270	4120	0.744	63.4	85.2	77.0	5400	29.3
EER-28.5B	2370	2850	2850	3620	0.887	74.9	84.5	77.0	6340	34.0
EER-30M	2220	2650	2650	3340	0.925	70.7	76.4	70.9	5400	28.9
EER-33S	3990	4800	4800	5970	0.506	62.0	123	121	7610	40.6
EER-33K	3300	4200	4200	5040	0.637	78.0	122	121	9560	50.1
EER-34.2	2580	3200	3200	3950	0.820	79.2	96.6	91.6	7660	40.4
EER-35H	3090	3700	3700	4700	0.678	75.1	111	100	8310	45.1
EER-35A	2620	3300	3300	4050	0.822	90.4	110	100	9940	53.4
EER-35B	2280	2800	2800	3570	0.963	105	109	100	11500	60.9
EER-39J	2850	3500	3500	4440	0.766	102	133	129	13500	69.8
EER-39.1	2880	3480	3480	4470	0.749	92.9	124	123	11500	59.9
EER-40H	3530	4000	4000	5470	0.613	96.1	157	147	15000	79.9
EER-40D	3400	4300	4300	5280	0.638	97.5	153	139	14900	80.3
EER-40	2870	3490	3490	4520	0.773	117	151	139	17700	94.3
EER-42	4080	5200	5200	6320	0.531	96.6	182	178	17600	91.9
EER-42P	5150	6300	6300	7960	0.419	96.0	229	222	22000	116
EER-42D	4450	5200	5200	6890	0.487	97.8	201	189	19600	104
EER-44	3810	4400	4400	5930	0.573	103	179	169	18400	96.8
EER-45	3930	4760	4760	6130	0.558	106	190	172	20100	108
EER-48.7	4330	5260	5260	6780	0.509	113	221	209	24900	132
EER-49M	5090	6500	6500	7920	0.429	105	245	230	25900	140
EER-49L	4500	5570	5570	7070	0.493	119	241	225	28500	153
EER-49P	4430	5380	5380	6970	0.501	121	240	225	29000	155
EER-54K	5350	6000	6000		0.412	115	280	278	32200	169
EER-90	6720	8250	8250		0.347	215	619	559	133000	698
EER-94	7490	9210	9210		0.312	222	712	707	158000	819

Specifications which provide more details for the proper and safe use of the described product are available upon request.
All specifications are subject to change without notice.