


UU Type

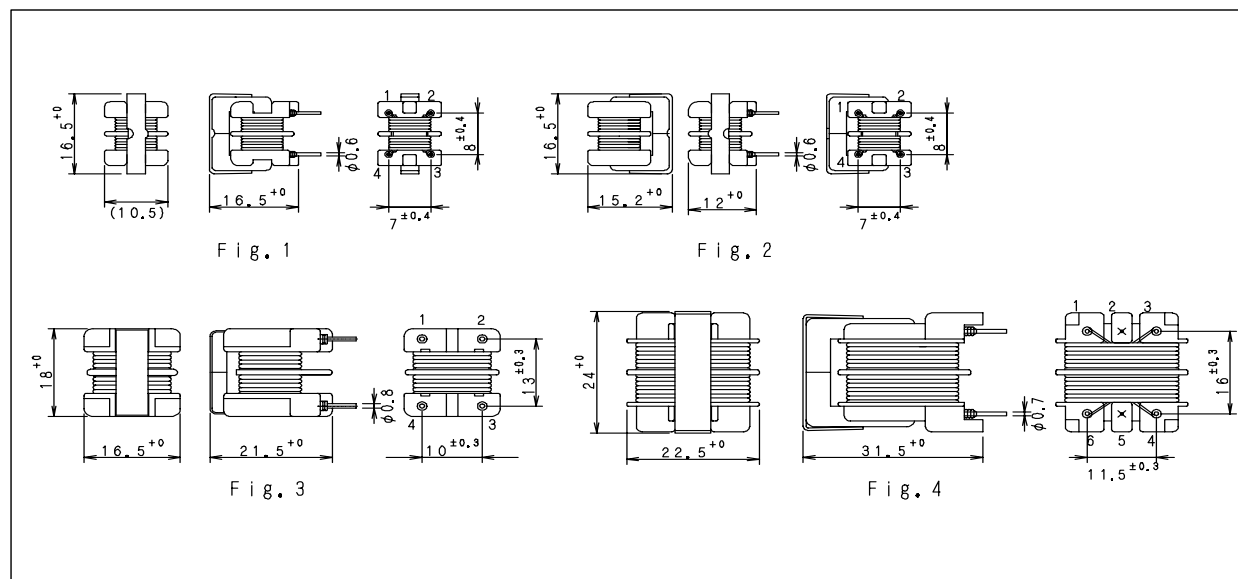

コイル名	使用コア	使用ボビン	使用金具	使用電線	巻数	インダクタンス	直流抵抗	定格電流	Fig.	備考
FU98H0R4A183	2E2-UU-9.8	TBB224A	TCY210B	2UEW0.18	90Ts	18mH+70%/-30%	1.66 以下	0.4A	2	
FU98VR12C303	2G1-UU-9.8X14.6	TBB213A	TCY210B	2UEW0.13	175Ts	30mH+70%/-30%	6.2 以下	0.12A	1	
FU98V0R2A143	2G1-UU-9.8X14.6	TBB213A	TCY210B	2UEW0.14	120Ts	14mH+70%/-30%	3.41 以下	0.2A	1	
FU98V0R5A362	2G1-UU-9.8X14.6	TBB213A	TCY210B	2UEW0.20	60Ts	3.6mH+70%/-30%	0.9 以下	0.5A	1	
FU98H0R5A802	2G1-UU-9.8X14.6	TBB224A	TCY210B	2UEW0.20	90Ts	8mH ± 30%	1.38 以下	0.5A	2	テープ
FU98VR24A253	2G1-UU-9.8X14.6	TBB213A	TCY210B	2UEW0.15	158Ts	25mH+70%/-30%	4.25 以下	0.24A	1	テープ
FU98V0R5A752	2G1-UU-9.8X14.6	TBB213A	TCY210B	2UEW0.20	91Ts	5mH以上	1.4 以下	0.5A	1	
FU98V0R3A822	2G1-UU-9.8X14.6	TBB213A	TCY210B	2UEW0.16	95Ts	5mH以上	2.5 以下	0.3A	1	
FU98V0R5A202	2G1-UU-9.8X14.6	TBB213A	TCY210B	2UEW0.23	45Ts	2mH+75%/-25%	0.48 以下	0.5A	1	
FU98V0R3A303	2H1-UU-9.8	TBB213A	TCY210B	2UEW0.16	100Ts	30mH+75%/-25%	2.3 以下	0.3A	1	
FU105V1R5A452	2E1-UU-10.5X15.6X5.3	TBB148C	TCY142A	1UEW0.35	55Ts	4.5mH+75%/-25%	0.37 以下	1.5A	3	
FU105V0R3A443	2E1-UU-10.5X15.6X5.3	TBB148C	TCY142A	2UEW0.18	170Ts	44mH+75%/-25%	4.2 以下	0.3A	3	
FU105V1R5A252	2E1-UU-10.5X15.6X5.3	TBB148C	TCY142A	1UEW0.40	41Ts	2.5mH+75%/-25%	0.2 以下	1.5A	3	
FU105V1R5A153	2E2-UU-10.5X15.6X5.3	TBB148C	TCY142A	2UEW0.37	72Ts	15mH+75%/-25%	0.48 以下	1.5A	3	テープ
FU105V0R7A343	2E2-UU-10.5X15.6X5.3	TBB148C	TCY142A	2UEW0.25	103Ts	34mH+75%/-25%	1.35 以下	0.7A	3	
FU105V1R2A123	2E2-UU-10.5X15.6X5.3	TBB148C	TCY142A	2UEW0.32	64Ts	12mH+75%/-25%	0.49 以下	1.2A	3	
FU105V0R5A103	2E6-UU-10.5X15.6X5.3	TBB148A	TCY142A	2UEW0.26	105Ts	10mH ± 40%	1.4 以下	0.5A	3	
FU105V3R0A271	2E6-UU-10.5X15.6X5.3	TBB148C	TCY142A	1UEW0.60	16Ts	200 μH以上	0.1 以下	3A	3	
FU105V2R0A152	2G1-UU-10.5X15.6X5.3	TBB148C	TCY142A	2UEW0.40	32Ts	1.5mH+75%/-25%	0.15 以下	2A	3	
FU18V1R0A142	2E6-UU-18X21.2	TBB222C	TCY223A	2UEW0.40	140Ts	1.4mH+75%/-25%	1.0 以下	1A	4	
FU18V1R5A243	2G4-UU-18X21.2	TBB222C	TCY223A	2UEW0.45	119Ts	24mH+75%/-25%	0.7 以下	1.5A	4	テープ